

6

5

4



3

2


1



REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Oct. 10, 2019

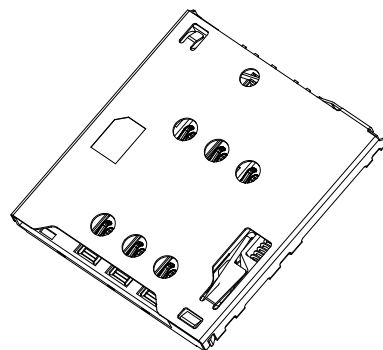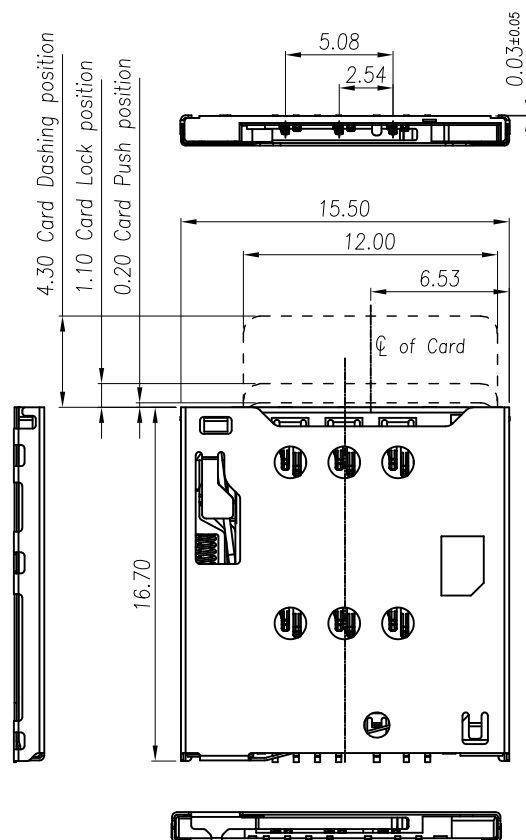

PERSPECTIVE VIEW

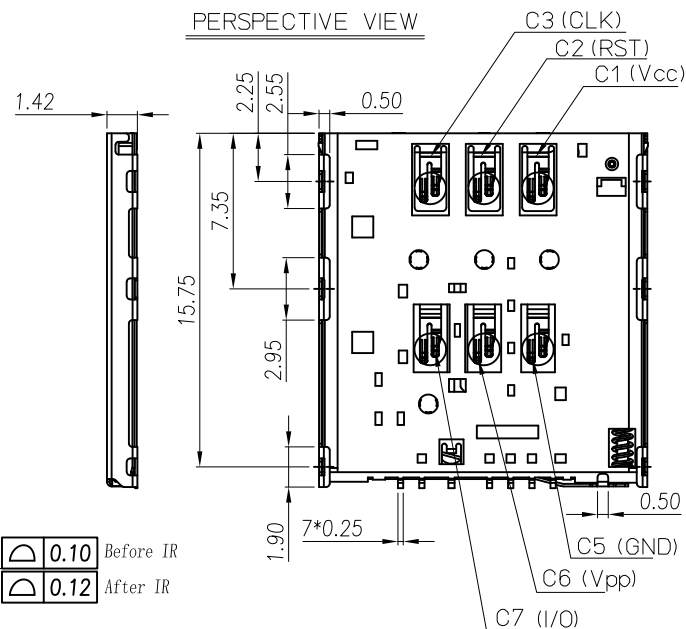

SPECIFICATION:

1.MATERIAL:

1.1 HOUSING:THERMOPLASTICS, LCP UL94V-0

1.2 TERMINAL:COPPER ALLOY

1.3 SHELL:STAINLESS STEEL

2.PLATED

2.1 TERMINAL:G/F PLATED ON CONTACT AREA

Au ON SOLDER AREA

2.2 SHELL:NICKEL PLATED OVERALL

3.ELECTRICAL CHARACTERISTICS:

3.1 CURRENT RATING:DC 0.5A max.

3.2 VOLTAGE RATING:DC 30V.

3.3 CONTACT RESISTANCE: 50mΩ max

3.4 INSULATION RESISTANCE:1000MΩ min.

at 500V DC.

3.5 WITHSTANDING VOLTAGE:500V AC



for 1 minute.

4.OPERATION TEMPERATURE:-40°C~+85°C

5.DURABILITY :3000 CYCLES

6.PACKAGE: TAPE REEL,1500PCS/REEL

Circuit Diagram for Card Detect Switch

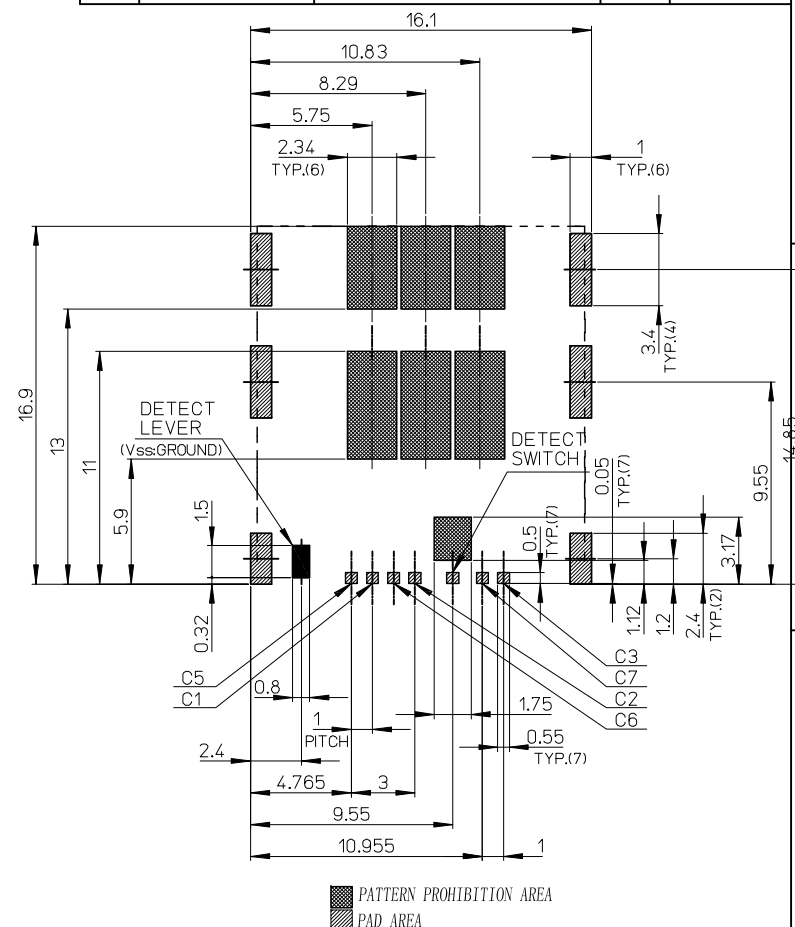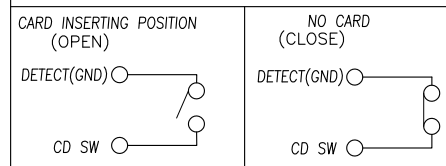

RECOMMENDED PCB PATTERN LAYOUT

(GENERAL TOLERANCE : ±0.05)

For more information, please help to contact: connmold@foxmail.com Tel.:18922965797

WWW.connmold.COM		ConnMold			
DIMENSION UNITS	TOLERANCE				
MM	X±0.50 .XX±0.25	PART NAME	MICRO SIM PUSH TYPE		
	.X±0.35 .XXX±0.15				
DRWN:Robert	Oct.10,2019			1.42MM HEIGHT	
CHK'D:Yuri	Oct.10,2019				
APPR:Linda	Oct.10,2019				
		PART NUMBER	REVISION		
		CMMSM661007	A		
THIRD ANGLE PROJECTION	CUSTOMER P/N	CUSTOMER	SHEET NUMBER		
	/	GENERAL MARKET	1 OF 2		

6

5

4

3

2

1

