

6

5

4





3

2

1



REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Oct. 12, 2021

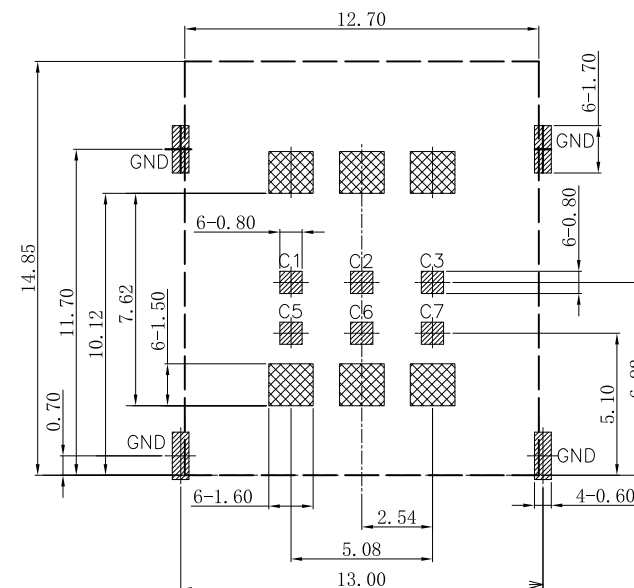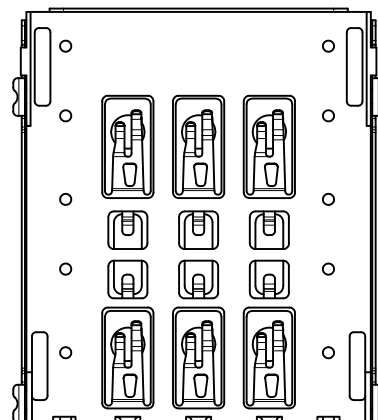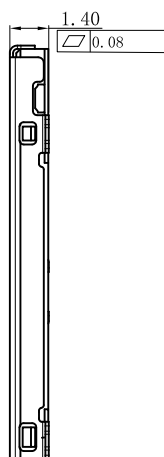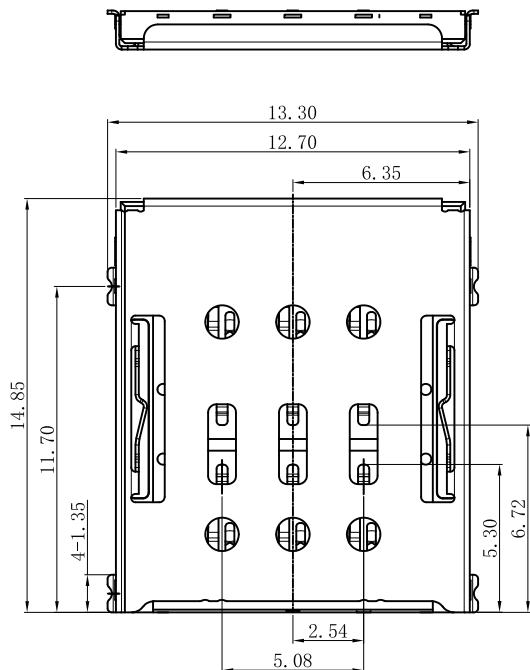

■ SMT SOLDER AREA
 ■ KEEP OUT AREA

RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05

NOTE:

1.MATERIAL:

HOUSING: LCP,BLACK,UL 94V-0
 CONTACT: PHOSPHOR BRONZE
 SHELL: STAINLESS STEEL

2.FINISH

CONTACT: 50u"Min NICKEL PLATING OVER ALL
 GOLD FLASH ON THE CONTACT AREA
 GOLD FLASH ON THE SOLDER AREA
 SHELL: 50U" MIN NICKEL PLATING OVER ALL
 GOLD FLASH ON THE SOLDER AREA

3.RATED PARAMETERS OF CONNECTOR

3-1.Operating temperature: -40°C to +85°C
 3-2.Rated Current: 0.5A
 3-3.Rater Voltage: 30V DC

4.ELECTRICAL MECHANICAL ENVIRONMENTAL

4-1.Dielectric withstanding Voltage: 500V AC min
 4-2.Insulation Resistance: 1000MΩ Min
 4-3.Durability: 3000 cycles

5.PACKAGE: TAPE REEL, 1500PCS/REEL,15K/CARTON

Nano SIM pin assignment

PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
GND	GND

For more information, please help to contact: connmold@foxmail.com, Tel.:18922965797

WWW.CONNMOLD.COM		ConnMold	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME	NANO SIM TRAY TYPE 1.40MM HEIGHT
DRWN:Robert	Oct. 12, 2021	PART NUMBER	CMNSM661009
CHK'D:Yuri	Oct. 12, 2021	REVISION	A
APPR:Linda	Oct. 12, 2021	CUSTOMER	GENERAL MARKET
THIRD ANGLE PROJECTION	CUSTOMER P/N	SHEET NUMBER	1 OF 2
	/		

6

5

4

3

2

1