



6 5 4 3 2 1

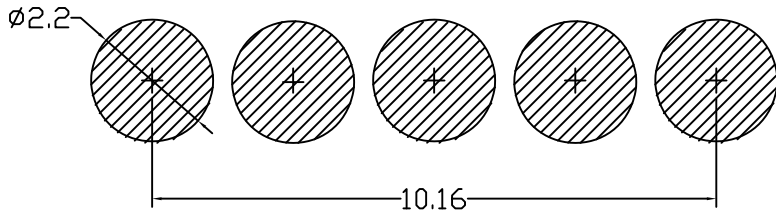

REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Sep. 12, 2021

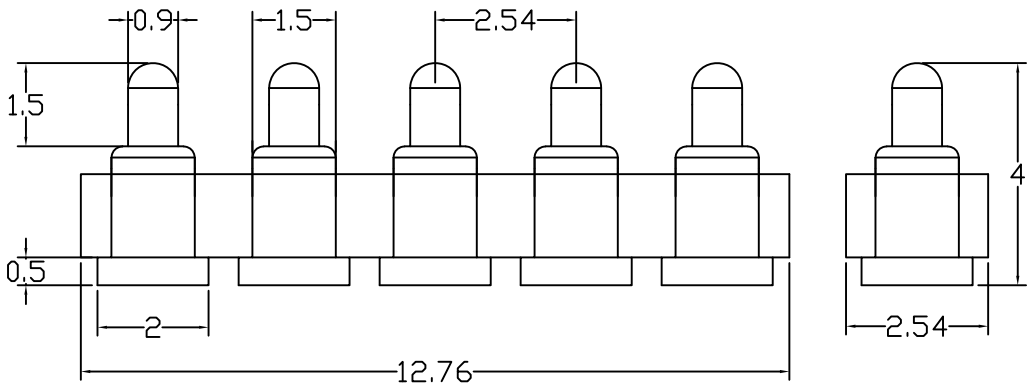

▨: SOLDER PAD

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
TOLERANCE:±0.05

NOTE;

- 1.Material
Barrel & Plunger: Brass C3604
Spring: SUS304 Insulation coating
- 2.Plating
Plunger: 10 microinch Min. Au over 50~100 microinch Ni
Barrel: 10 microinch Min. Au over 50~100 microinch Ni
- 3.Electrical
Rated current & voltage: DC 12V; 2A Max.
Contact resistance: 50 Ω Max. at working height(quiessence)
- 4.Mechanical
Spring force: 80±30g at working height(quiessence).
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage,please operate it based on the working height.
- 6.RoHS and HF compliant.

For more information, please feel free to contact Neal. His email is :connmold@foxmail.com Tel:18922965797			
WWW.connmold.COM		<h1>ConnMold</h1>	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME POGO PIN 5 PIN 2.54 MM PITCH	
DRWN:Robert	Sep. 12, 2021	PART NUMBER	
CHK'D:Yuri	Sep. 12, 2021	CMPGP661008	
APPR:Lee	Sep. 12, 2021	REVISION	
THIRD ANGLE PROJECTION		CUSTOMER	
		GENERAL MARKET	
CUSTOMER P/N		SHEET NUMBER	
/		1 OF 1	

6 5 4 3 2 1