

REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Dec. 12, 2020



NOTES:


SPECIFICATION:

1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

A 1	GND	B 12	GND
A 4	VBUS	B 9	VBUS
A 5	CC1	B 7	DN2
A 6	DP1	B 6	DP2
A 7	DN1	B 5	CC2
A 9	VBUS	B 4	VBUS
A 12	GND	B 1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

For more information, please help to contact: connmold@foxmail.com		Tel.: 18922965797	
WWW.CONNMOLD.COM		<h1>ConnMold</h1> <p>PART NAME USB TYPE C FEMALE 14P 9.04MM HEIGHT</p>	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NUMBER	REVISION
DRWN: Robert	Dec. 12, 2020	CMUCF661023	A
CHK'D: Yuri	Dec. 12, 2020	CUSTOMER GENERAL MARKET	
APPR: Linda	Dec. 12, 2020	SHEET NUMBER 1 OF 2	
THIRD ANGLE PROJECTION	CUSTOMER P/N /		

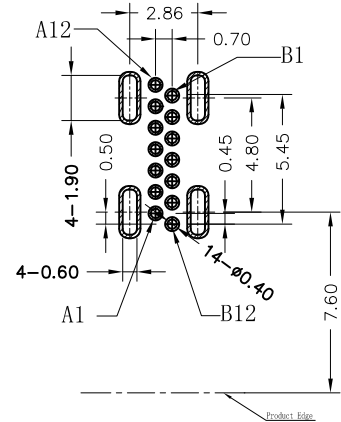

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

