

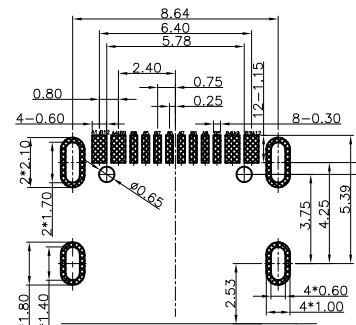







| REV | EC No. | DESCRIPTION | Symbol | DATE |
|-----|--------|-------------|--------|---------------|
| A | / | new release | / | Dec. 12, 2020 |
| | | | | |



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



SPECIFICATION

- CURRENT RATING : 5.0A FOR Vbus PIN, 1.25A FOR Vconn PIN, 0.25A FOR OTHER PINS.
- CONTACT RESISTANCE : 40mΩ.
- INSULATION RESISTANCE : 1000MΩ MIN.
- DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC MIN.
- OPERATING TEMPERATURE : -40°C TO +85°C.
- MATING FORCE : 5~20N.
- UNMATING FORCE : 8~20N.
- DURABILITY : 10,000 CYCLES.
- PACKAGE :TAPE REEL, 1000PCS/REEL

| | | | |
|-----|-------------|-----|-------------|
| A1 | GND | B12 | GND |
| A4 | VBUS | B9 | VBUS |
| A5 | CC1 | B8 | SBU2 |
| A6 | DP1 | B7 | DN2 |
| A7 | DN1 | B6 | DP2 |
| A8 | SBU1 | B5 | CC2 |
| A9 | VBUS | B4 | VBUS |
| A12 | GND | B1 | GND |
| PIN | SIGNAL NAME | PIN | SIGNAL NAME |

For more information, please help to contact: connmold@foxmail.com

Tel.: 18922965797

WWW.connmold.COM

DIMENSION UNITS

MM

TOLERANCE
X±0.50 .XX±0.25
.X±0.35 .XXX±0.15

ConnMold

PART NAME USB TYPE C RECEPTACLES
NORMAL TYPE

DRWN: Robert

Dec. 12, 2020

CHK'D: Yuri

Dec. 12, 2020

APPR: Linda

Dec. 12, 2020


PART NUMBER

CMUCF661029

REVISION

A

THIRD ANGLE PROJECTION



CUSTOMER P/N

/

CUSTOMER

GENERAL MARKET

SHEET NUMBER

1 OF 1