


REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Dec. 12, 2020



SPECIFICATION

1. CURRENT RATING : 5.0A FOR Vbus PIN,
1.25A FOR Vconn PIN,
0.25A FOR OTHER PINS.
2. CONTACT RESISTANCE : 40mΩ.
3. INSULATION RESISTANCE : 1000MΩ MIN.
4. DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC MIN.
5. OPERATING TEMPERATURE : -40°C TO +85°C.
6. MATING FORCE : 5~20N.
7. UNMATING FORCE : 8~20N.
8. DURABILITY : 10,000 CYCLES.
9. PACKAGE :TAPE REEL, 1000PCS/REEL

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

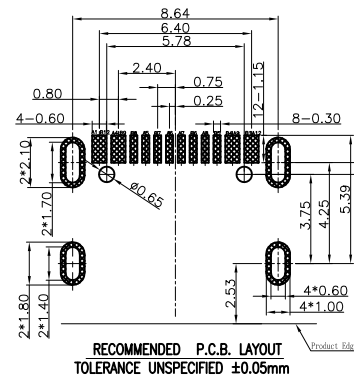

For more information, please help to contact: connmold@foxmail.com				Tel.: 18922965797	
WWW.connmold.COM				ConnMold	
DIMENSION UNITS		TOLERANCE			
MM		X±0.50 .XX±0.25 .X±0.35 .XXX±0.15		PART NAME USB TYPE C RECEPTACLES MOLDING 3 CYCLES	
DRWN: Robert		Dec.12,2020		PART NUMBER CMUCF661030	
CHK'D: Yuri		Dec.12,2020			
APPR: Linda		Dec.12,2020		REVISION A	
THIRD ANGLE PROJECTION		CUSTOMER P/N		SHEET NUMBER	
		/		GENERAL MARKET	
				1 OF 1	