







REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Oct. 10, 2019

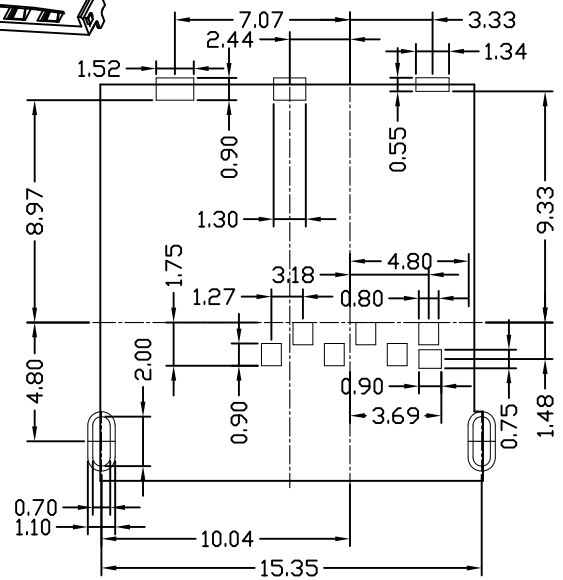

- SPECIFICATION:**
- MATERIAL:**
 - HOUSING: THERMOPLASTICS, LCP UL94V-0
 - TERMINAL: COPPER ALLOY
 - SHELL: STAINLESS STEEL
 - PLATED**
 - TERMINAL: 3U" Au PLATED ON CONTACT AREA
Au ON SOLDER AREA
 - SHELL: NICKEL PLATED OVERALL
 - ELECTRICAL CHARACTERISTICS:**
 - CURRENT RATING: DC 0.5A max.
 - VOLTAGE RATING: DC 30V.
 - CONTACT RESISTANCE: 50mΩ max
 - INSULATION RESISTANCE: 1000MΩ min. at 500V DC.
 - WITHSTANDING VOLTAGE: 500V AC for 1 minute.
 - OPERATION TEMPERATURE:** -40°C ~ +85°C
 - DURABILITY:** 1500 CYCLES
 - PACKAGE:** TAPE REEL, 1000PCS/REEL,

RECOMMENDED PCB LAYOUT
TOL:(±0.05)

LAYOUT IS COMPATIBLE WITH TE 2174803-2

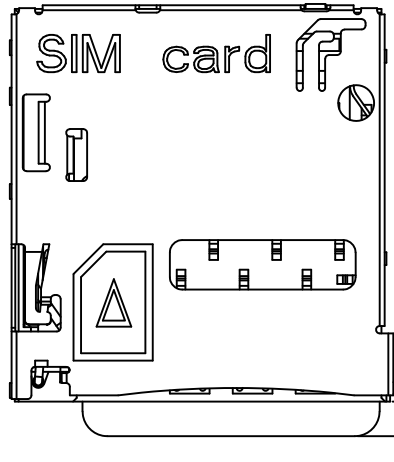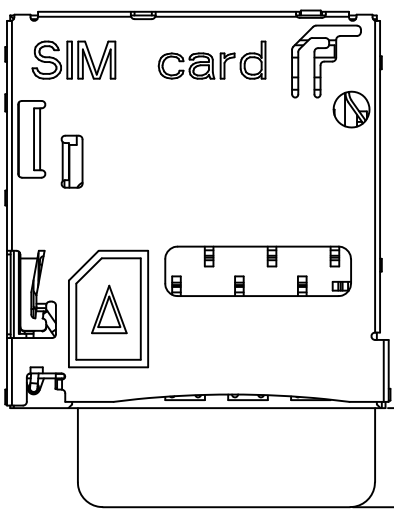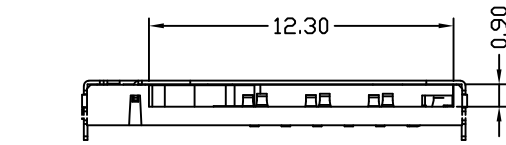

For more information, please help to contact: connmold@foxmail.com Tel.: 18922965797

WWW.CONNMOLD.COM		ConnMold	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME	MICRO SIM PUSH PUSH 1.80MM HEIGHT
DRWN: Robert	Oct.10,2019	PART NUMBER	CMMSM661009
CHK'D: Yuri	Oct.10,2019	REVISION	A
APPR: Linda	Oct.10,2019	CUSTOMER	GENERAL MARKET
THIRD ANGLE PROJECTION	CUSTOMER P/N	SHEET NUMBER	1 OF 2