

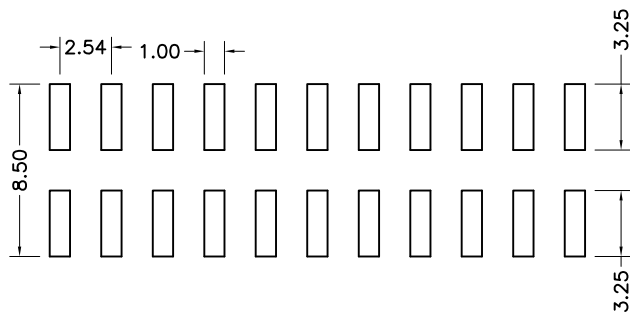
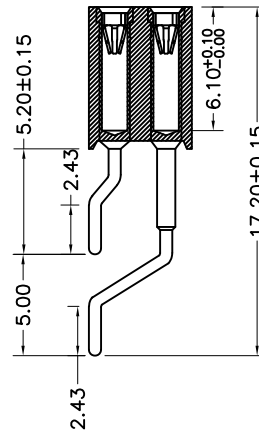


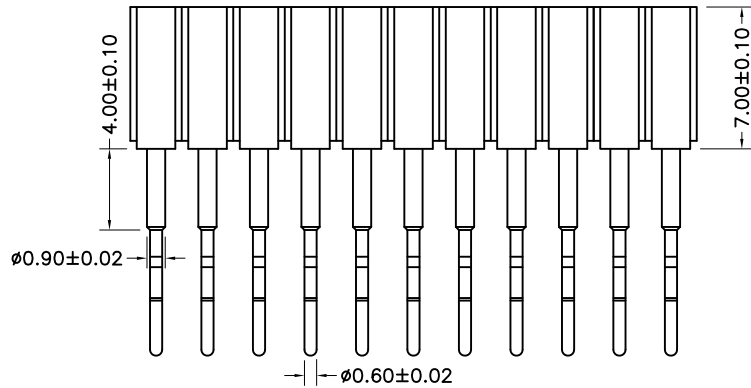

REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Oct. 12, 2021

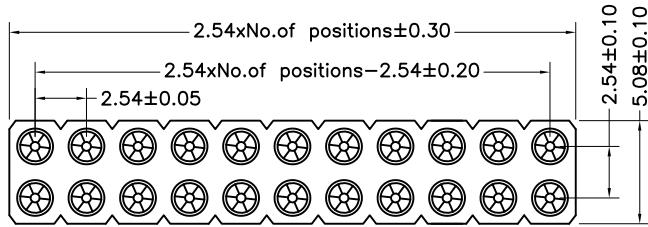

RECOMMENDED PCB LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTES:

1. MATERIAL:

- 1.1 Housing:PPS UL94V-0; Color Black.
- 1.2 PIN:Copper Alloy, C3604,Tin plated
- 1.3 Inner contact: Beryllium copper, C17200, GOLD FLASH PLATED
- 1.4 Its plug is 0.70mm/0.90mm/SQ0.635

2. SPECIALITY:

- 2.1 Rated current:3.0A
- 2.2 Rated voltage:60V
- 2.3 Contact Resistance:10mΩ MAX
- 2.4 Insulation Resistance:1000MΩ MIN 500V DC
- 2.5 Dielectric withstanding voltage: 100V AC.
- 2.6 Solder ability:255±5℃, 10±0.5s.
- 2.7 Durability:500 Cycles Min.
- 2.8 Insertion Force:140gf max @ Ø0.66
- 2.9 Withdrawal Force:25gf min @ Ø0.66
- 3.0 Operating condition:Temperature-40℃~+85℃; Humidity 80% R.H MAX
- 4.0 Package: tape reel, 500PCS/Reel

CMPHF101003

- 10: 2*5
- 12: 2*6
- ...
- 22: 2*11

For more information, please help to contact: connmold@foxmail.com, Tel.:18922965797

WWW.CONNMOLD.COM		ConnMold	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME	IC SOCKET 2*5 R/A TYPE 5.08MM HEIGHT
DRWN:Robert	Oct. 12, 2021	PART NUMBER	CMPHF101003
CHK'D:Yuri	Oct. 12, 2021	REVISION	A
APPR:Linda	Oct. 12, 2021	CUSTOMER	GENERAL MARKET
THIRD ANGLE PROJECTION	CUSTOMER P/N	CUSTOMER	SHEET NUMBER
	/	GENERAL MARKET	1 OF 2