


REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Oct. 12, 2021

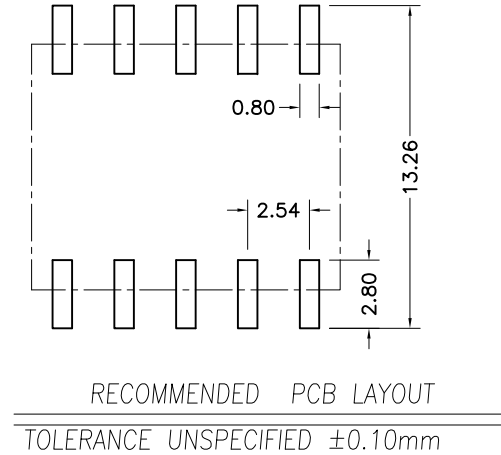

NOTES:

1. MATERIAL:

- 1.1 Housing:PPS UL94V-0; Color Black.
- 1.2 PIN:Copper Alloy. C3604,Tin plated
- 1.3 Inner contact: Beryllium copper, C17200, GOLD FLASH PLATED

2. SPECIALITY:

- 2.1 Rated current:3.0A
- 2.2 Rated voltage:60V
- 2.3 Contact Resistance:10mΩ MAX
- 2.4 Insulation Resistance:1000MΩ MIN 500V DC
- 2.5 Dielectric withstanding voltage: 100V AC.
- 2.6 Solder ability:255±5°C, 10±0.5s.
- 2.7 Durability:500 Cycles Min.
- 2.8 Insertion Force:250gf max @ Ø0.432
- 2.9 Withdrawal Force:70gf min @ Ø0.432
- 2.10 Operating condition:Temperature-40°C~+85°C; Humidity 80% R.H MAX

3. PACKAGE: TAPE REEL WITH MYLAR, 550PCS/REEL

CMPHFXX1001

- 04: N=4, 2\*2PIN
- 06: N=6, 2\*3PIN
- . . . . .
- 20: N=20, 2\*10PIN

For more information, please help to contact: connmold@foxmail.com, Tel.:18922965797				
WWW.CONNMOLD.COM		<h1>ConnMold</h1>		
DIMENSION UNITS	TOLERANCE			
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME	IC SOCKET N PIN (2*X) 3.00MM HEIGHT	
DRWN:Robert	Oct. 12, 2021	PART NUMBER	CMPHFXX1001	
CHK'D:Yuri	Oct. 12, 2021	REVISION	A	
APPR:Linda	Oct. 12, 2021	CUSTOMER	GENERAL MARKET	
THIRD ANGLE PROJECTION	CUSTOMER P/N	CUSTOMER	SHEET NUMBER	
	/	GENERAL MARKET	1 OF 2	