

6 5 4 3 2 1


REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Mar. 12, 2018



NOTES :

- 1.0. SPECIFICATIONS :
 - 1.1. CONNECTOR: SMA PLUG
 - 1.2. NOMINAL CHARACTERISTIC IMPEDANCE: 50 Ohm
 - 1.3. APPLICABLE FREQUENCY RANGE: LTE,880~960MHZ &1710~1880MHZ
 - 1.4. VSWR: 2.0 MAX.
 - 1.5. TEMPERATURE : -40°C TO +85°C
 - 1.6. RADIATION PATTERN: OMNI-DIRECTIONAL
 - 1.7. ANTENNA HEIGHT:25 ~65cm
 - 1.8. ANTENNA GAIN: +2.5 ~ 3.0 dBi min
 - 1.9. POLARIZATION: VERTICAL
- 2.0. MATERIAL :
 - 2.1.CABLE: RG174 BLACK , L=3050MM
 - 2.2.SMA PLUG:AU PLATED
 - 2.3.ANTENNA : 433MHZ ROUND
 - 2.4.TUBE: BLACK, OD3.5MM*20MM,
- 3.0. PACKAGE : PE BAG, BLISTER BOX,CARTON

THIS ANTENNA IS FOR 4G

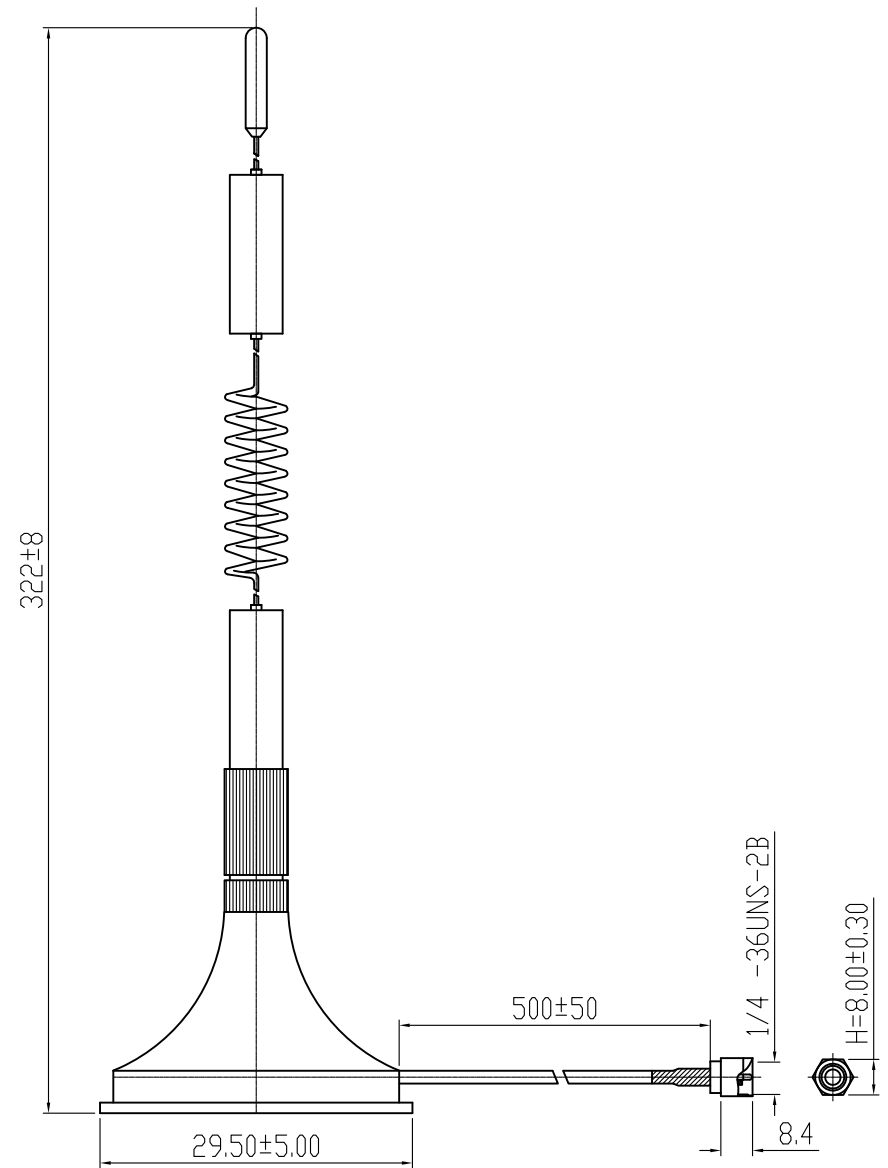

For more information, please feel free to contact Neal. His email is :connmold@foxmail.com Tel:18922965797			
WWW.connmold.COM		ConnMold	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME 4G ANTENNA RG174 BLACK+SMA+ANTENNA	
DRWN:Robert	Mar. 12, 2018	PART NUMBER CMRFA661006	
CHK'D:Yuri	Mar. 12, 2018	REVISION A	
APPR:Lee	Mar. 12, 2018	SHEET NUMBER 1 OF 1	
THIRD ANGLE PROJECTION	CUSTOMER P/N	CUSTOMER	
	/	GENERAL MARKET	

6 5 4 3 2 1