

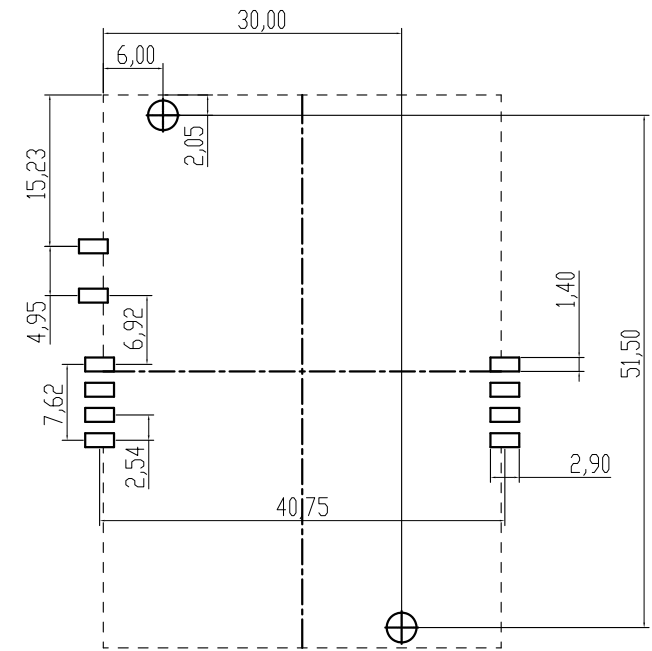



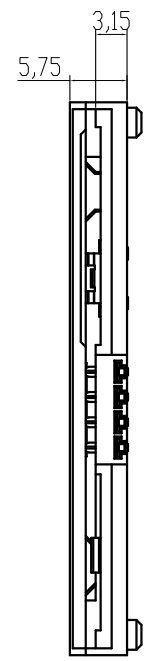


REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Dec. 12, 2020

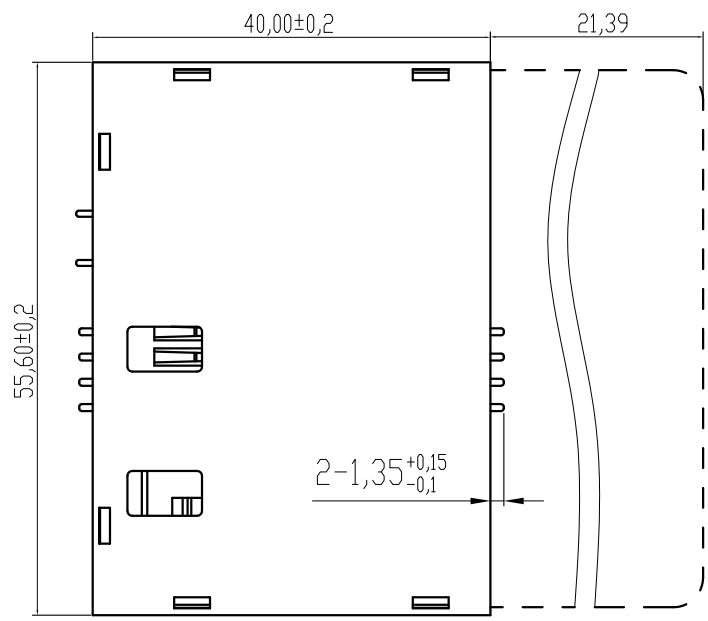

Recommended P.C.B Layout (Top Side)
TOL.: ±0.05

- SPECIFICATION:**
1. MATERIAL:
 - 1.1 HOUSING: PPS
 - 1.2 TERMINAL: COPPER ALLOY
 2. PLATED
 - 2.1 TERMINAL: G/F PLATED ON CONTACT AREA
TIN ON SOLDER AREA
 3. ELECTRICAL CHARACTERISTICS:
 - 3.1 CURRENT RATING: DC 0.5A max.
 - 3.2 VOLTAGE RATING: DC 30V.
 - 3.3 CONTACT RESISTANCE: 50mΩ max
 - 3.4 INSULATION RESISTANCE: 1000MΩ min.
at 500V DC.
 - 3.5 WITHSTANDING VOLTAGE: 500V AC
for 1 minute.
 4. OPERATION TEMPERATURE: -40°C ~ +85°C
 5. DURABILITY: 10000 CYCLES
 6. PACKAGE: TRAY PACKAGE, 500PCS/CARTON

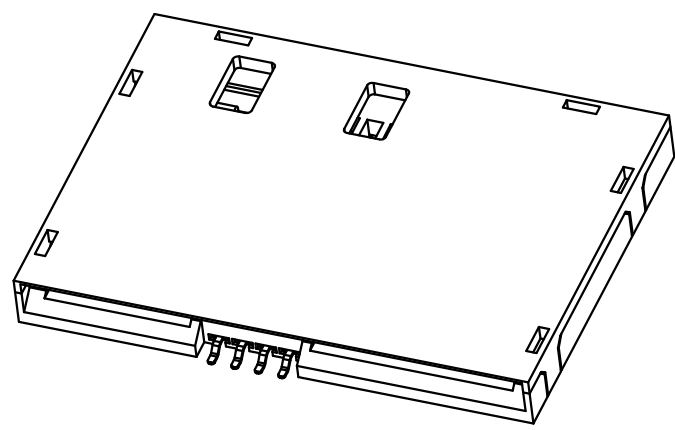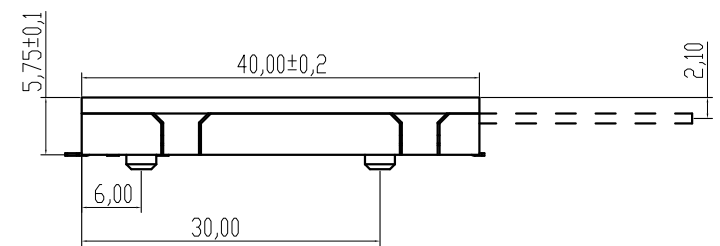

For more information, please help to contact: connmold@foxmail.com		Tel.: 18922965797	
WWW.connmold.COM		<h1>ConnMold</h1>	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME SMART CARD CONNECTOR 3.15MM 5.75MM HEIGHT	
DRWN: Robert	Dec. 12, 2020	PART NUMBER CMSIM661015	
CHK'D: Yuri	Dec. 12, 2020	REVISION A	
APPR: Linda	Dec. 12, 2020	CUSTOMER GENERAL MARKET	
THIRD ANGLE PROJECTION	CUSTOMER P/N /	SHEET NUMBER 1 OF 1	