



- NOTES:  
SPECIFICATION:
1. CURRENT RATING: 3A MAX
  2. VOLTAGE: 150 VAC
  3. TEMPERATURE RANGE: -55 °C ~ 85 °C
  4. CONTACT RESISTANCE: 30 MILLIONHM MAX
  5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
  6. LNSERTION FORCE : 5N~20N
  7. UNMATING FORCE: 8N~20N
  8. DURABILITY: 10,000 CYCLES

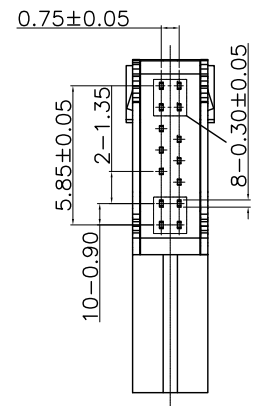

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	D+		
A7	D-	B6	D+
		B5	CC2
		B4	VBUS
A9	VBUS	B1	GND
A12	GND		
PIN	SIGNAL NAME	PIN	SIGNAL NAME

REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Dec. 12, 2020

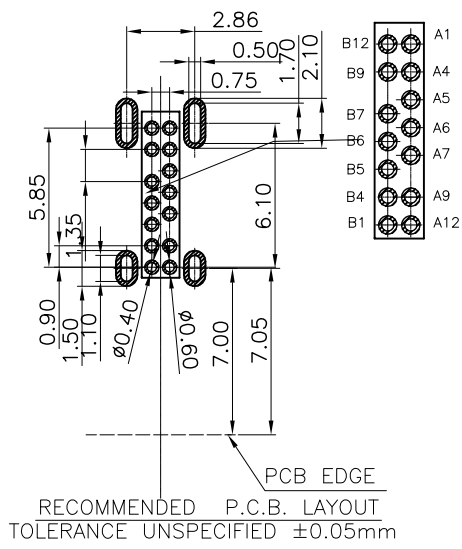

6	HOOK	STAINLESS STEEL	—	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	—	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	LCP	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

For more information, please help to contact: [connmold@foxmail.com](mailto:connmold@foxmail.com) Tel.:18922965797

WWW.connmold.COM

**ConnMold**

DIMENSION UNITS TOLERANCE  
MM X±0.50 .XX±0.25  
.X±0.35 .XXX±0.15

DRWN:Robert Dec.12,2020

CHK'D:Yuri Dec.12,2020

APPR:Linda Dec.12,2020

THIRD ANGLE PROJECTION

CUSTOMER P/N /

PART NAME  
USB TYPE C FEMALE 14P  
SIDE ENTRY DIP 1.60

PART NUMBER  
CMUCF661023C

CUSTOMER  
GENERAL MARKET

REVISION  
A

SHEET NUMBER  
1 OF 2