

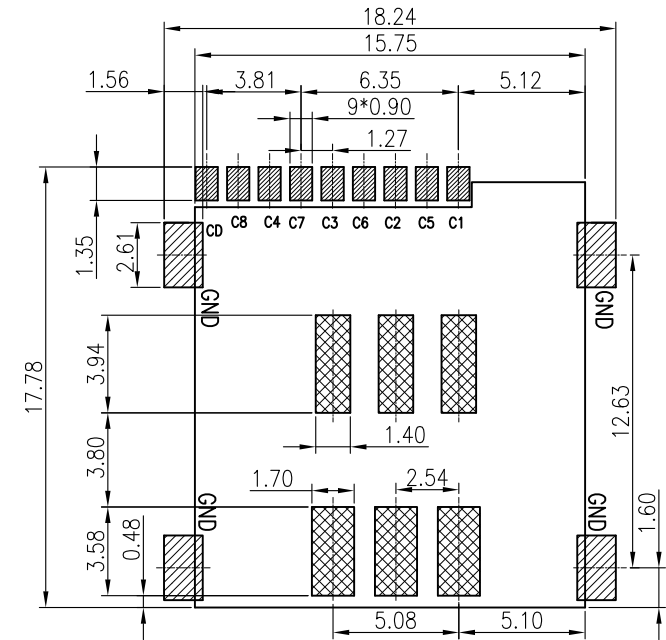


REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Oct. 10, 2019

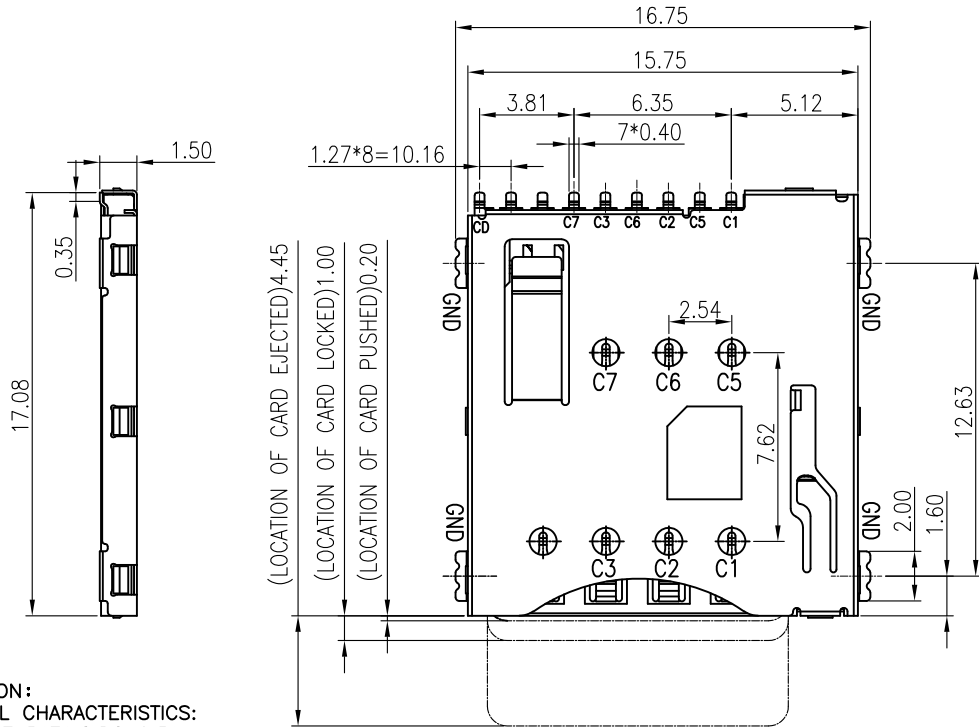


RECOMMENDED P.C.B LAYOUT  
COMPONENT SIDE(TOLERANCE ±0.05)


ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



- SPECIFICATION:**
- ELECTRICAL CHARACTERISTICS:**
    - CURRENT RATING:DC 0.5A max.
    - VOLTAGE RATING:DC 30V.
    - CONTACT RESISTANCE: 50mΩ max
    - INSULATION RESISTANCE:1000MΩ min. at 500V DC.
    - WITHSTANDING VOLTAGE:500V AC for 1 minute.
  - OPERATION TEMPERATURE:**-40°C~+85°C
  - DURABILITY :**1500 CYCLES
  - PACKAGE:** TAPE REEL,1000PCS/REEL,

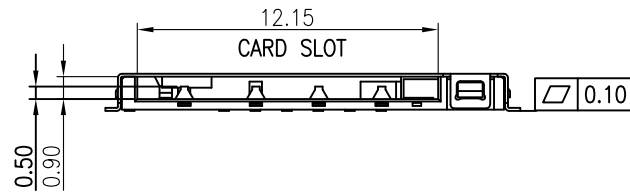

MicroSIM CARD



No	Description	Dosage	Material	Color/plating
7	LINK	1PC	STEEL	PLATE WITH NICKEL
6	SPRING	1PC	SWP-B	PLATE WITH NICKEL
5	Slide	1PC	HI-TEMP THERMOPLASTIC	UL94V-0 BLACK
4	Shell	1PC	STEEL	SMT AREA:GOLD PLATED
3	CD Switch	1PC	COPPER ALLOY	CONTACT AREA:GOLD PLATED
2	Data Contact	1PC	COPPER ALLOY	CONTACT AREA:GOLD PLATED
1	Housing	1PC	HI-TEMP THERMOPLASTIC	UL94V-0 BLACK
NO	Description	Dosage	Material	Color/plating

Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

For more information, please help to contact: connmold@foxmail.com Tel.:18922965797

WWW.connmold.COM

**ConnMold**

PART NAME **MICRO SIM PUSH PUSH 1.50MM HEIGHT**

DRWN:Robert Oct.10,2019

CHK'D:Yuri Oct.10,2019

APPR:Linda Oct.10,2019

PART NUMBER **CMMSM661010** REVISION **A**

THIRD ANGLE PROJECTION CUSTOMER P/N / CUSTOMER **GENERAL MARKET** SHEET NUMBER **1 OF 2**