


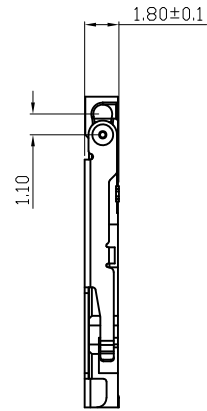
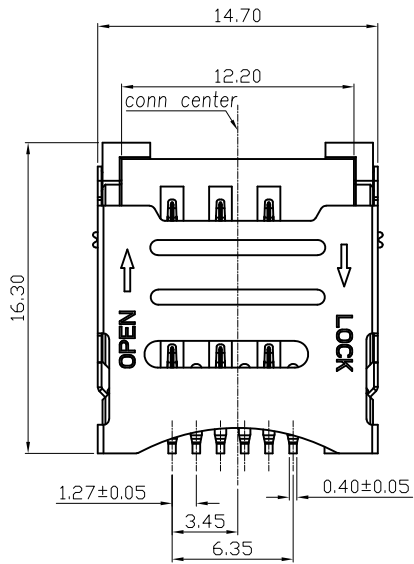


REV	EC No.	DESCRIPTION	Symbol	DATE
A	/	new release	/	Oct. 10, 2019

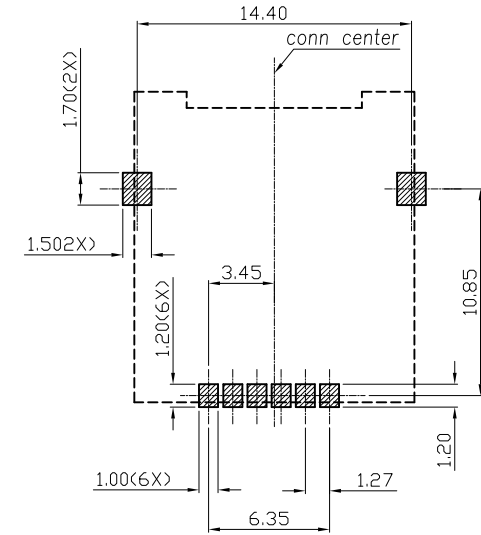

LOCK CARD TATUS OPEN CARD TATUS

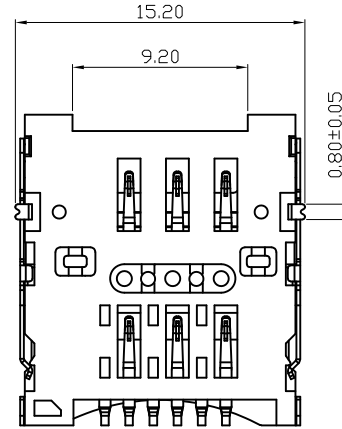


PAD AREA

KEEP OUT AREA


RECOMMENDED P.C.B LAYOUT

COMPONENT SIDE(TOLERANCE ±0.05)

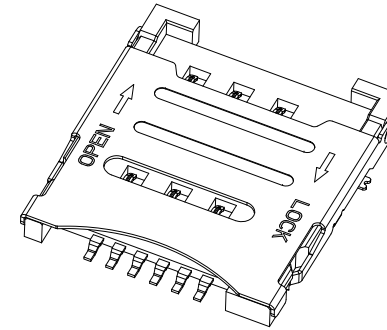


NOTES:

- ELECTRICAL CHARACTERISTICS
  - CONTACT RESISTANCE: 60 Milliohms Max
  - INSULATION RESISTANCE: 1,000 Megohms Min.
  - VOLTAGE RATING: 50V.
  - CURRENT RATING: 1.0A.
- MECHANICAL CHARACTERISTICS
  - OPERATION TEMPERATURE RANGE: -20°C~+85°C
  - DURABILITY: 5000 CYCLES
- MATERIAL:
  - HOUSING: THERMOPLASTIC,UL 94-V0
  - TERMINAL: PHOSPHOR BRONZE,T=0.15
  - SHELL: STAINLESS STEEL,T=0.20
- FINISHED:
  - TERMINAL: Ni PLATED UNDER, 3U" Au MIN PLATED ON CONTACT AREA,AU PLATED ON SOLDER TAIL
  - SHELL: Ni PLATED UNDER,G/F PLATED ON SOLDER TAIL

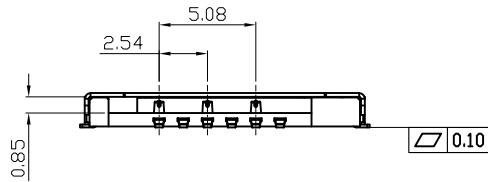

MicroSIM CARD



MicroSIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

For more information, please help to contact: connmold@foxmail.com Tel.:18922965797

WWW.connmold.COM		<h1>ConnMold</h1>	
DIMENSION UNITS	TOLERANCE		
MM	X±0.50 .XX±0.25 .X±0.35 .XXX±0.15	PART NAME MICRO SIM FLIP TYPE 1.80MM HEIGHT	
DRWN:Robert	Oct.10,2019	PART NUMBER CMMSM661011	
CHK'D:Yuri	Oct.10,2019	REVISION A	
APPR:Linda	Oct.10,2019	SHEET NUMBER 1 OF 1	
THIRD ANGLE PROJECTION	CUSTOMER P/N /	CUSTOMER GENERAL MARKET	